


MARKING ON THE BODY

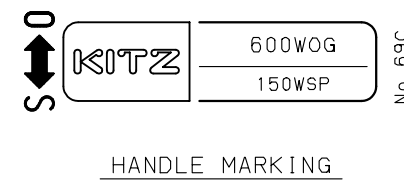

DIMENSIONS UNIT: inch

NOMINAL SIZE	d	d1		d3	H	D1	L	L1	L2	G
		MAX.	MIN.							
1/2	0.59	0.631	0.627	3/4-11.5NHR	1.65	3.23	2.95	1.06	2.49	0.50
3/4	0.79	0.881	0.877	3/4-11.5NHR	2.01	3.94	3.54	1.42	3.07	0.75

- NOTE (1) VALVE SIZE IDENTIFICATION.
 (2) DEZINCIFICATION RESISTANT BRASS.
 (3) Cr PLATING.
 (4) ELECTROPLATED COATINGS OF ZINC AND PLASTIC COVERING.
 (5) END CONNECTION: ASME B16.18/ASME B1.20, 7 3/4 11.5NHR.
 (6) DON'T USE FOR FLAMMABLE GAS OR TOXIC GAS.

NO	NAME OF PARTS	QTY	MATERIALS	SPECIFICATIONS
				ASTM SPEC.
1	BODY	1	FORGED BRASS	B283 NO. C37700
2	BODY CAP	1	BRASS ROD	B16
				(SIZE 1/2)
		1	FORGED BRASS	B283 NO. C37700
				(SIZE 3/4)
3	STEM	1	SPECIAL BRASS (2)	
4	BALL	1	FORGED BRASS (3)	B283 NO. C37700
7	GLAND	1	BRASS ROD	B16
8	GLAND PACKING	1	PTFE	
9	HANDLE	1	CARBON STEEL (4)	
10	HANDLE NUT	1	CARBON STEEL	
16	SPRING WASHER	1	CARBON STEEL	
19	GASKET	1	NBR	
30	BALL SEAT	2	PTFE	
86	CAP & CHAIN	1	BRASS	

STANDARD	FACE TO FACE OR END TO END	KITZ STANDARD
	END CONNECTION	(5)
	WALL THICKNESS	KITZ STANDARD
	PRESSURE TEST	KITZ STANDARD
FIGURE		CTAFC / No. 69C

TYPE 600 FORGED BRASS
 BALL VALVES
 FULL BORE.
 SOLDERED END x 3/4 HOSE CONNECTION WITH CAP AND CHAIN.

DATE APPD	JAN. 30. '09	DRAWING NO	△		
APPD BY	M. TAKUSAGAWA	925-C60039	△		
CHKD BY	I. TAKANO		△		
DSGND BY	K. NAKAI		△		
DRAWN BY	Y. ASAKAWA		REV-07	MARK	DATE

KITZ CORPORATION

KITZ