

# INVESTMENT CAST 316 S.S. SAMPLING VALVE

FIG. NO. 51B (CF8M) RESILIENT SEAT - LEVER OPERATED



## Design Features


- Cast in corrosion resistant stainless steel.
- 2" NPT X 1 1/2" outlet
- Designed with all wetted parts of 316SS (CF8M) and a viton resilient seat for positive shut-off.
- Lever operated
- Designed for installation in pipe lines or tanks where an occasional sample is required.
- 150 PSI Maximum working pressure.

*Designed to handle corrosive fluids  
in the process industries.*



# INVESTMENT CAST 316 STAINLESS STEEL SAMPLING VALVES

Size 2" NPT x 1 1/2" Outlet

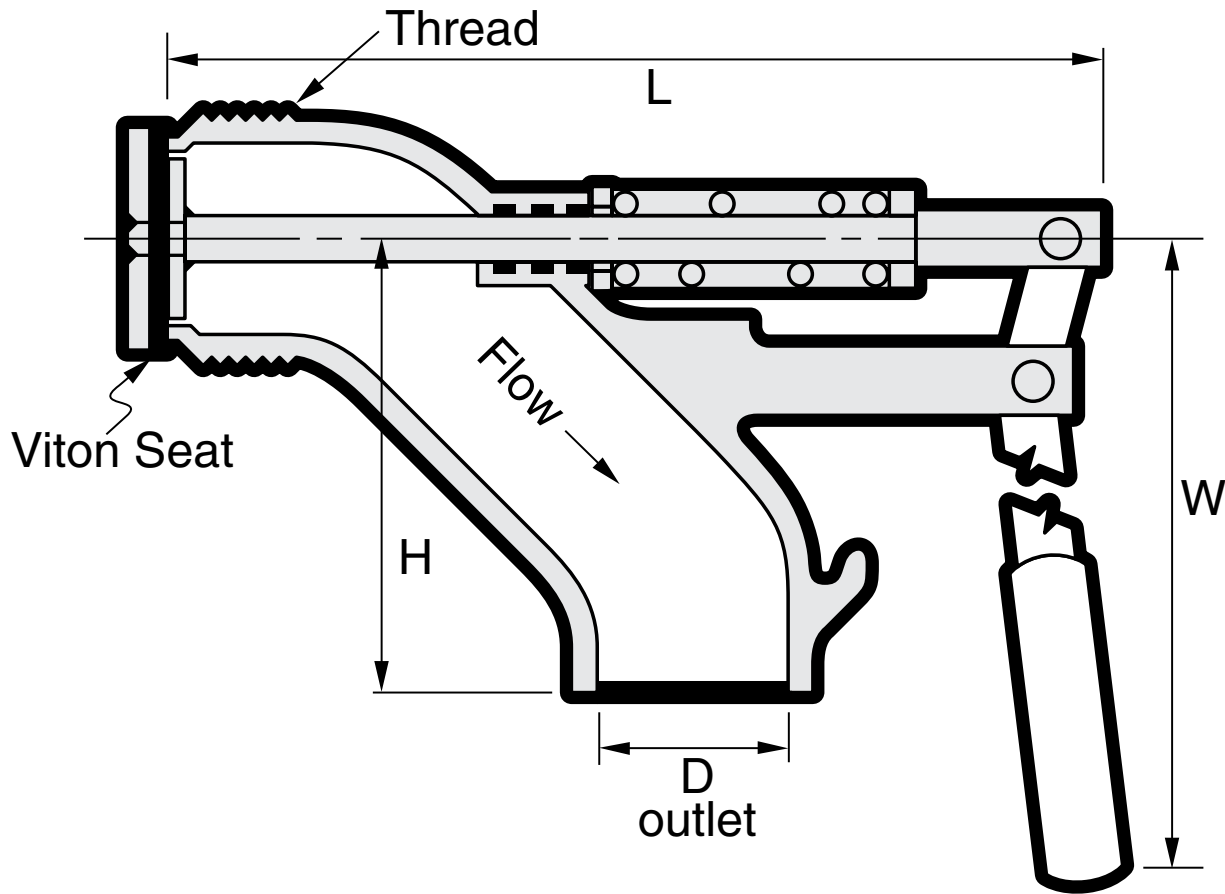

## DIMENSIONS (UNIT: INCH/MM)

DIMENSIONS							
Size	D	THD	L	H	W	Y	Weight
2 in	1.5	2 NPT	8.875	5.3125	11.25	9.25	5 LBS
51 mm	38	2 NPT	225	135	285	235	2.3 KGS